

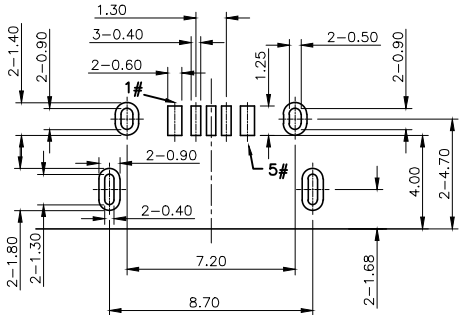
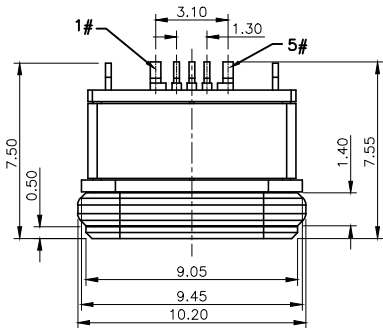
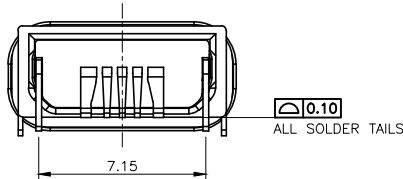


RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE





RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ± 0.05



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 3A;
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - INSERTION FORCE: 5-20N;
 - EXTRACTION FORCE: 6-20N;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8.
 - PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
 - PACKAGING: TAPE & REEL.
 - Waterproof grade: IPX8

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

3	Shell1/2	2	Ni Plating	
2	Contact	5	Phosphor bronze Au/Ni Plating T=0.20mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE



CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONICS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	MICRO USB CONNECTOR	DRAWING	Z. L. Liang	DWG. No.	
PART NO.	MICRO USB 5P B TYPE防水板上不锈钢壳长6.35四脚插板	CHECK	G. C. Chen	REV.	A0
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED X. X $\pm$ 0.3 X. XX $\pm$ 0.2 X. XXX $\pm$ 0.1	ANGLE $\pm 2^\circ$	APPROVAL	G. C. Chen	DATE
		SCALE	1:1	PAGE	1 OF 1