

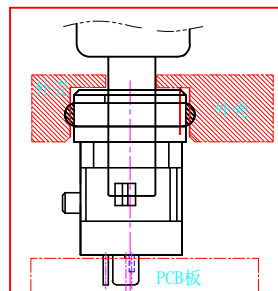


RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE

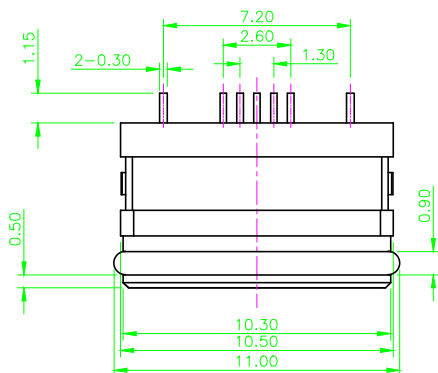





组装示意图




开孔尺寸参考
组装外壳时需要打环保润滑油

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 1.5A
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - INSULATION RESISTANCE: 1000MΩ MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - INSERTION FORCE: 3.5Kgf (35N) Max.;
 - EXTRACTION FORCE: 0.8Kgf (8N) Min.;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7
 - PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
 - PACKAGING: TAPE & REEL.
 - Waterproof grade: IPX7

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

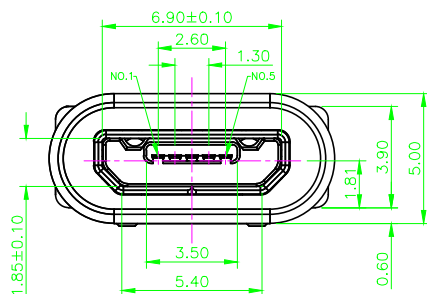

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.05

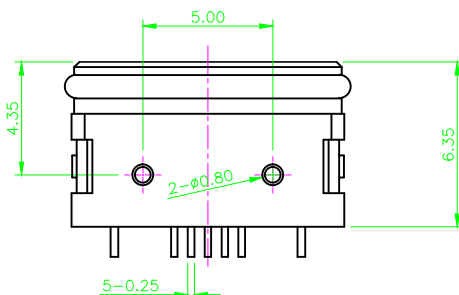

5	接触脚	1	BLACK	
4	Shell	1	SUS304R-1/2H Ni PlatingT=0.30mm	
3	Contact	5	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA9T&LCP (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONICS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	MICRO USB CONNECTOR		DRAWING	Z. L. Liang	DWG. No.	
PART NO.	Micro USB 5Pin DIP (B) Type 防水型H6.35立式插件		CHECK	G. C. Chen	REV.	A0
	UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X. X ± 0.3 X. XX ± 0.2 X. XXX ± 0.1	ANGLE	APPROVAL	G. C. Chen
				±2°	SCALE	1:1
					PAGE	1 OF 1