
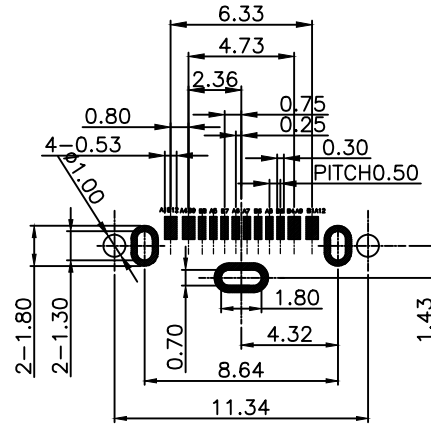
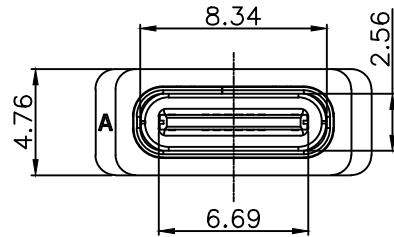

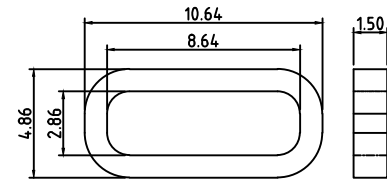

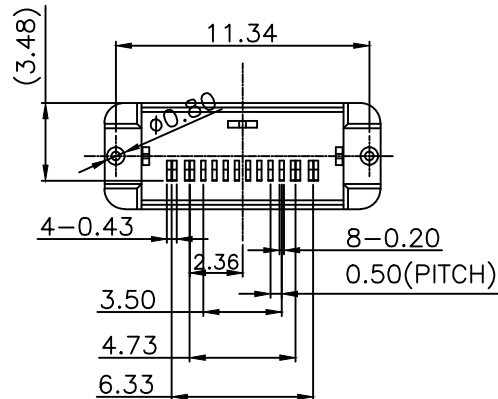




RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE±0.05)NOTES:
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES

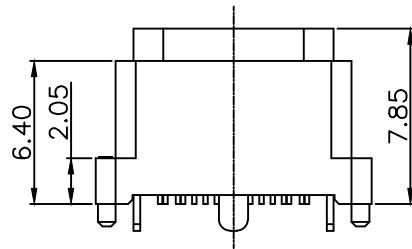

建议胶圈尺寸

A1	GND	B12	GND	6	防水圈	硅胶	BLACK	1PCS
A4	VBUS	B9	VBUS	5	SHELL	STAINLESS STEEL	NI Plated	1PCS
A5	CC1	B8	SBU2	4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
A6	DP1	B7	DN2	3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
A7	DN1	B6	DP2	2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
A8	SBU1	B5	CC2	1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
A9	VBUS	B4	VBUS					
A12	GND	B1	GND					
PIN	SIGNAL NAME	PIN	SIGNAL NAME	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR	DRAWING	Z. L. Liang	DWG. No.	
PART NO.	TYPE-C 16Pin 立贴H7.85三脚有柱防水IP68母座	CHECK	G. C. Chen	REV.	A0
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED X. X ± 0.3 X. XX ± 0.2 X. XXX ± 0.1	ANGLE ±2°	APPROVAL	G. C. Chen	DATE
			SCALE	1:1	PAGE
					1 OF 1