

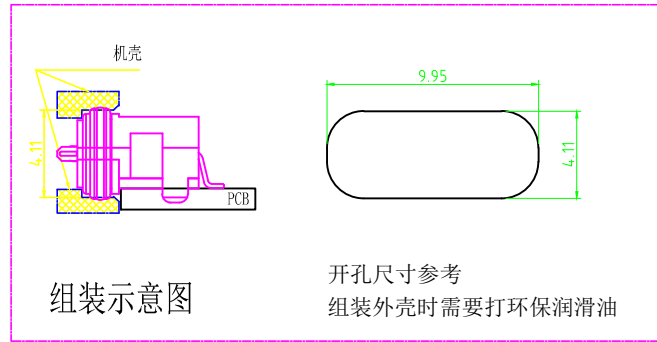
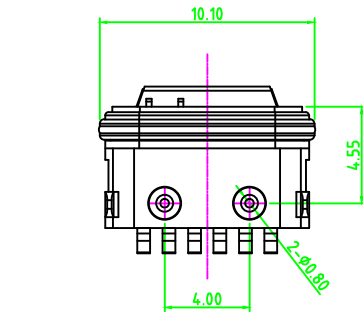
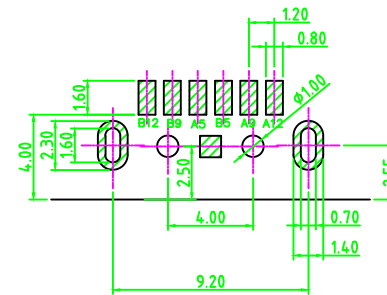






SPECIFICATIONS:

- 1. ELECTRICAL CHARACTERISTICS:**
 - 1.1. RATING:** 3A;
 - 1.2. CONTACT RESISTANCE:** 30 mΩ MAX.(INITIAL);
 - 1.3. DIELECTRIC WITHSTANDING:** 100V AC MIN.;
 - 1.4. INSULATION RESISTANCE:** 100MΩ MIN.;
- 2. DURABILITY:** 5,000 CYCLES MIN.;
- 3. INSERTION FORCE:** 5-20N;
- 4. EXTRACTION FORCE:** 6-20N;
- 5. WATER PROOFNESS:** THIS PRODUCT IS BASED ON IPX7.
- 6. PLUG INTERFACE DIMENSIONS** COMFORM TO USB2.0 SPEC.
- 7. PACKAGING:** TAPE & REEL.



A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

3	Shell	1	Ni Plating	
2	Contact	6	Phosphor bronze Au/Ni Plating T=0.20mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE



PART NAME		TYPE-C CONNECTOR			DRAWING	Z. L. Liang	DWG. No.	
PART NO.		TYPE-C6P L5. 7两脚超薄H3. 37板上SMT防水母座			CHECK	G. C. Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS	$X. X \pm 0.3$	ANGLE	APPROVAL	G. C. Chen	DATE	
	mm	OTHERWISE SPECIFIED	$X. XX \pm 0.2$ $X. XXX \pm 0.1$	$\pm 2^\circ$	SCALE	1:1	PAGE	1 OF 1