

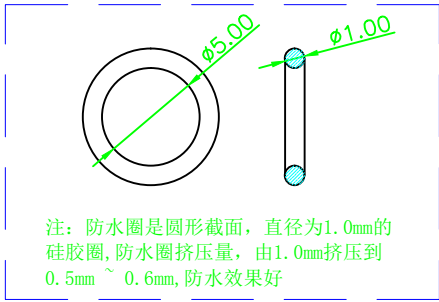


RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE






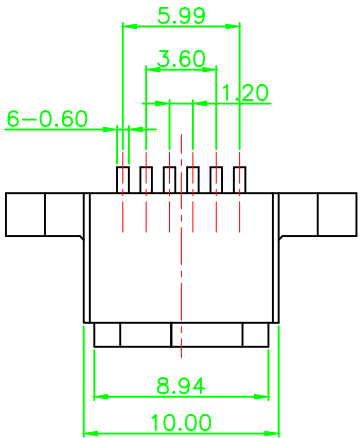


注：防水圈是圆形截面，直径为1.0mm的
硅胶圈，防水圈挤压量，由1.0mm挤压到
0.5mm ~ 0.6mm，防水效果好



Recommended P.C.B. Layout
Unspecified tolerance: ± 0.05
(Top view)

- SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES
 9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8.

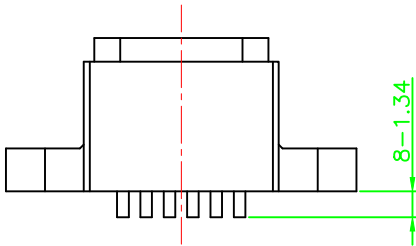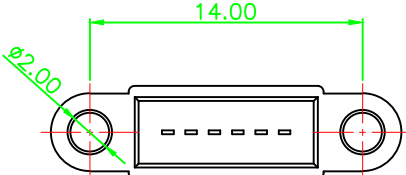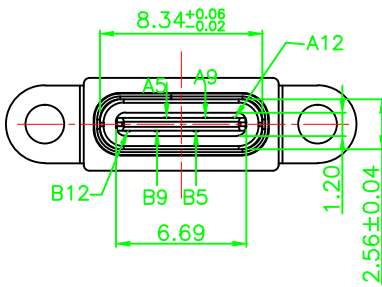

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	Shell2	1	SUS301 Ni Plating T=0.20mm	Ni:40~120u";
4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40~120u";
3	Housing2	1	PA10T(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	TYPE-C CONNECTOR	DRAWING	Z. L. Liang	DWG. No.	
PART NO.	TYPEC-6P立式插件H7.88锁螺型防水IP67母座	CHECK	G. C. Chen	REV.	A0
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED X. X ± 0.3 X. XX ± 0.2 X. XXX ± 0.1	ANGLE $\pm 2^{\circ}$	APPROVAL	G. C. Chen	DATE
			SCALE	1:1	PAGE
					1 OF 1