
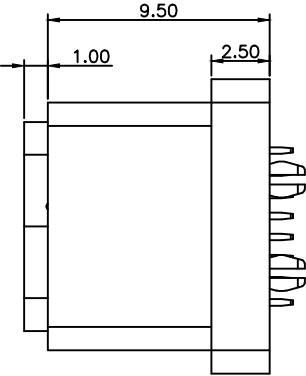






RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE



CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

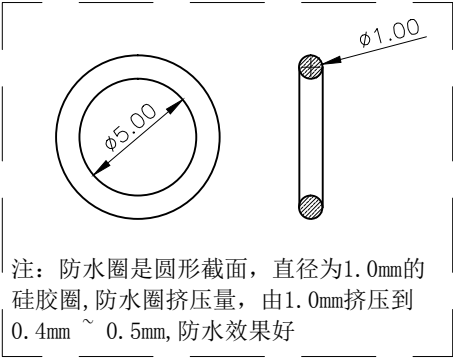

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. LNSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES
 9. DUSTPROOF AND WATERPROOF GRADE IP67.

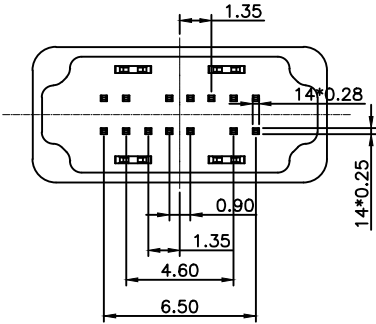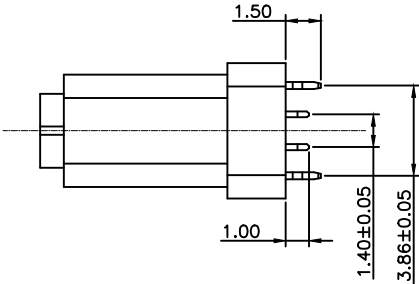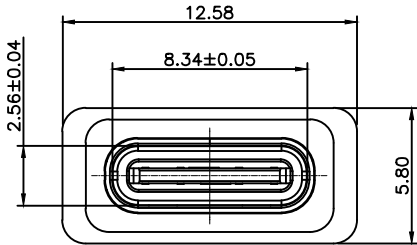

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

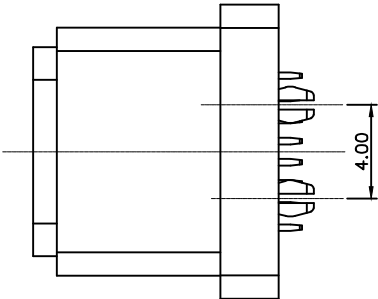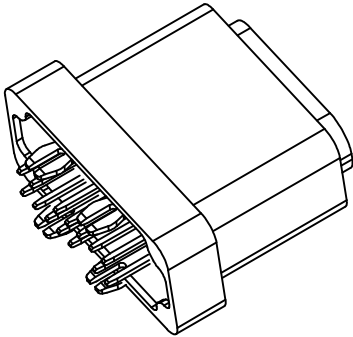

LOGO	MYLAR	SHELL	CONTACT	SOLDER	PAKING	SHELL MATERIAL
		NI	Fu" Au	Fu" Au	TRAY	SUS

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONCS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	TYPE-C CONNECTOR	DRAWING	Z. L. Liang	DWG. No.	
PART NO.	TYPE-C 14P立式防水H10.5四脚全插	CHECK	G. C. Chen	REV.	A0
UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGLE	G. C. Chen	DATE	
mm	X. X ± 0.3 X. XX ± 0.2 X. XXX ± 0.1	±2°	SCALE	1:1	PAGE 1 OF 1