
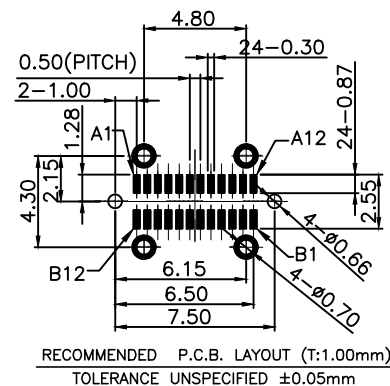

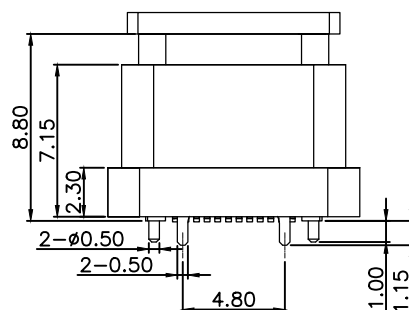

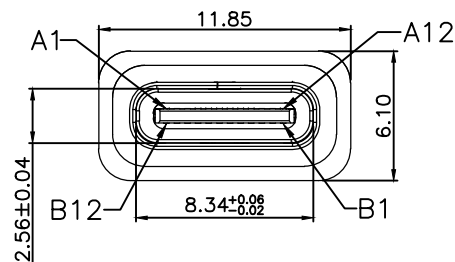


SYMBOL	REV.	REVISION	APPROVAL	DATE





NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES

PIN	NUMBER	SIGNAL NAME	PIN	NUMBER	SIGNAL NAME
A1		GND	B12		GND
A2		SSTXp1	B11		SSRXp1
A3		SSTXn1	B10		SSRXn1
A4		VBUS	B9		VBUS
A5		CC1	B8		SBU2
A6		Dp1	B7		Dn2
A7		Dn1	B6		Dp2
A8		SBU1	B5		CC2
A9		VBUS	B4		VBUS
A10		SSRXn2	B3		SSTXn2
A11		SSRXp2	B2		SSTXp2
A12		GND	B1		GND

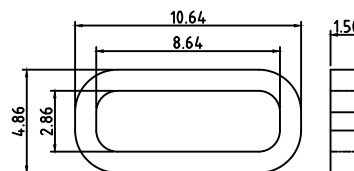

建议胶圈尺寸

6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONICS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		TYPE-C CONNECTOR			DRAWING	Z. L. Liang	DWG. No.	
PART NO.		TYPE-C-3.1 24P inline SMT带柱H8.8四脚插件防水IP67母座			CHECK	G. C. Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS		X. X ± 0.3	ANGLE	G. C. Chen	DATE	
	mm	OTHERWISE SPECIFIED		X. XX ± 0.2 X. XXX ± 0.1	±2°	SCALE	1:1	PAGE