


注：防水圈是圆形截面，直径为1.0mm的硅胶圈，防水圈挤压量，由1.0mm挤压到0.5mm~0.6mm，防水效果好

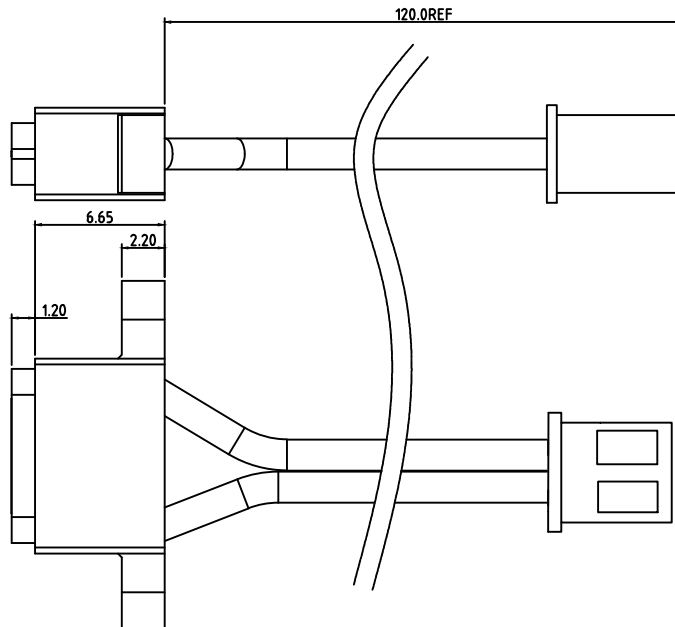


黑 负极 A12/B12

红 正极 A9/B9

- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
 - 1.1. RATING: 3A;
 - 1.2. CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - 1.3. DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - 1.4. INSULATION RESISTANCE: 100MΩ MIN.;
 2. DURABILITY: 10,000 CYCLES MIN.;
 3. INSERTION FORCE: 5-20N;
 4. EXTRACTION FORCE: 6-20N;
 5. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX6.
 6. PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
 7. PACKAGING: TAPE & REEL.

		B12	GND
A9	VBUS	B9	VBUS
A12	GND		
PIN	SIGNAL NAME	PIN	SIGNAL NAME

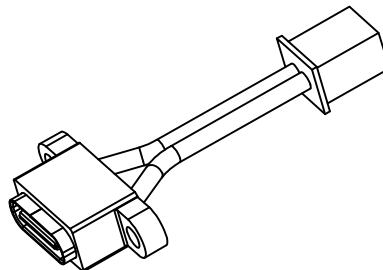

	线材	1	XH2.54-T 镀锡端子线径 1.6mm	
3	Shell	1	SUS304R-1/2H Ni PlatingT=0.25mm	
2	Contact	6	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA10T (GF30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONCS TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		TYPE-C CONNECTOR			DRAWING	Z. L. Liang	DWG. No.	
PART NO.		TYPE-C 铜螺丝焊线式2PIN 充电款防水IP67母座带线			CHECK	G. C. Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	X. X ± 0.3	ANGLE	APPROVAL	G. C. Chen	DATE	
	mm		X. XX ± 0.2 X. XXX ± 0.1		±2°	SCALE	1:1	PAGE