

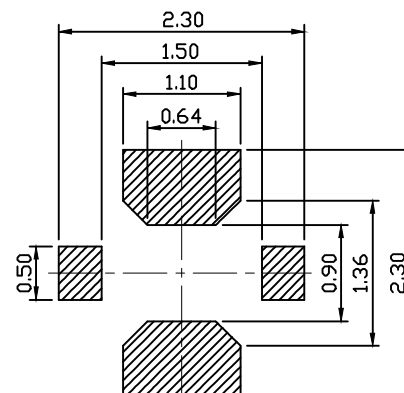

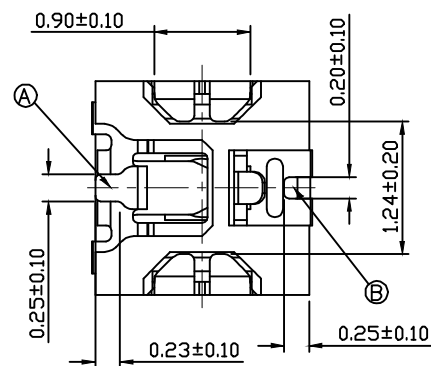
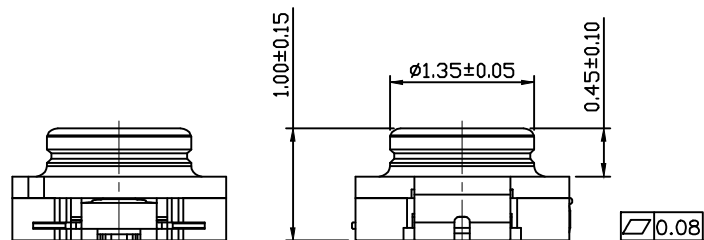
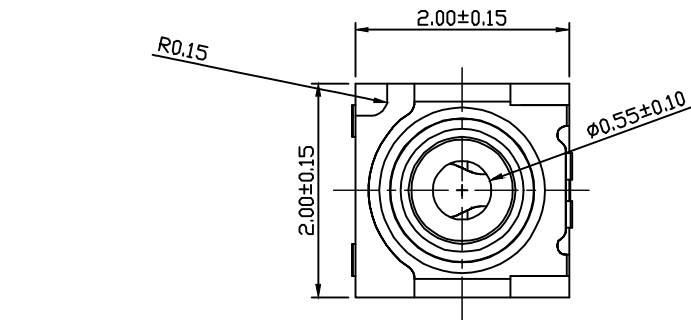


RoHS Compliant

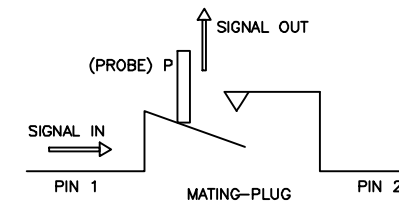

Recommend PCB Layout
General Tolerance: ±0.05

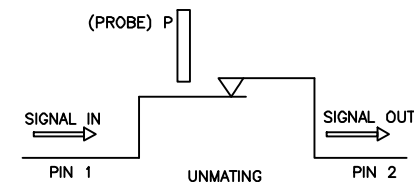

NOTES:

- 1.1 Rated Voltage 60V AC max.
- 1.2 Frequency Range DC ~1GHz
- 1.3 Impedance 50Ω
- 1.4 Power Rating 2W
- 1.5 Operating Temperature -40 ~ +85 °C
- 1.6 Insulation Resistance 500MΩ min.
- 1.7 Withstanding Voltage 300V AC & 1minute
- 1.8 Initial Contact Resistance 70 mΩ max.
- 2.1 Voltage Standing Wave Ratio(VSWR) 1.2 max. (DC~3GHz)
1.3 max. (3~6GHz)
1.5 max. (6~11GHz)
0.10dBmax. (DC~3GHz)
0.20dBmax. (3~6GHz)
0.50dBmax. (6~11GHz)
- 2.2 Insertion loss 20 dBmin. (DC~3GHz)
15 dBmin. (3~6GHz)
10 dBmin. (6~11GHz)
- 2.3 Isolation
- 2.4 Durability 100 cycles
- 3.1 Packing taPe & reel 3000Pcs/Reel (8mm)

HF-RF3-04A2	E	TOP HOUSING	1	Hight Temp. Plastic UL94V-0/BLACK
	D	DOWN HOUSING	1	Hight Temp. Plastic UL94V-0/BLACK
	C	SHELL	1	Copper Alloy/Au Plated Over Ni
	B	PIN 2	1	Stainless Steel/Au Plated Over Ni
	A	PIN 1	1	Stainless Steel/Au Plated Over Ni
PROD. NO.	ITEM	PART NAME	Q'TY	MATERIAL/FINISH

CIKI 东莞市皓富电子科技有限公司

DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	HF-RF3-04A2		DRAWING	Z.L.Liang	DWG.No.	
PART NO.	HF-RF3-04A2		CHECK	G.C.Chen	REV.	A0
	UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1	ANGLE	G.C.Chen	DATE
	mm			±2°	SCALE	1:1
			APPROVAL	G.C.Chen	PAGE	1 OF 1