

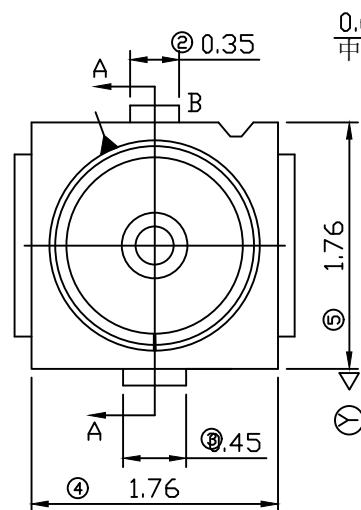

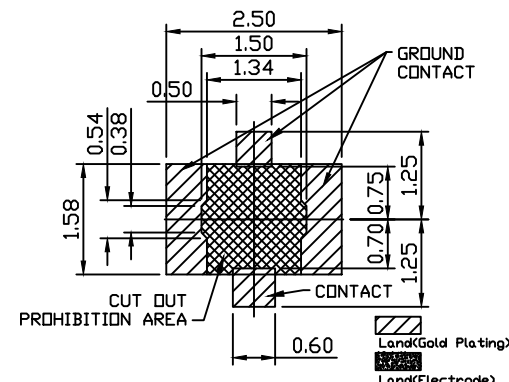

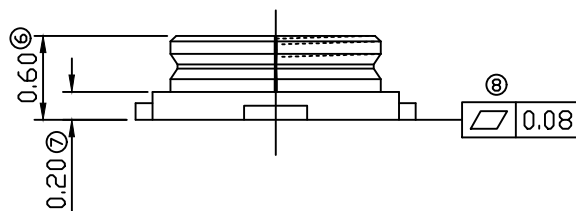
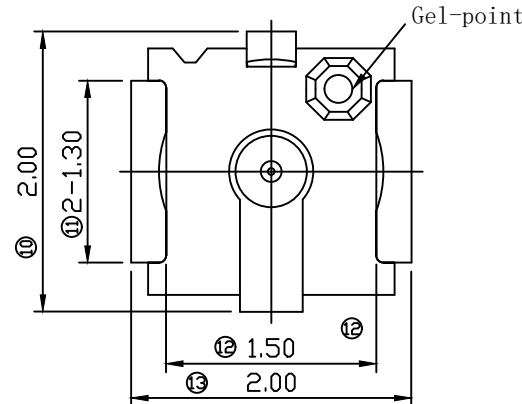


RoHS Compliant


SYMBOL	REV.	REVISION	APPROVAL	DATE

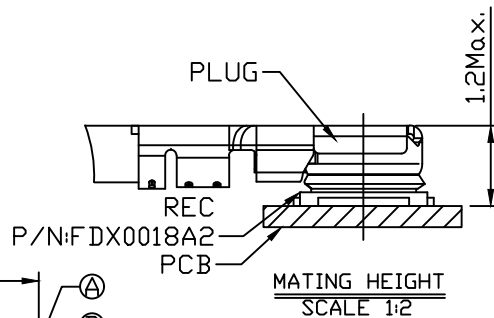

0.60±0.02
中心针高度

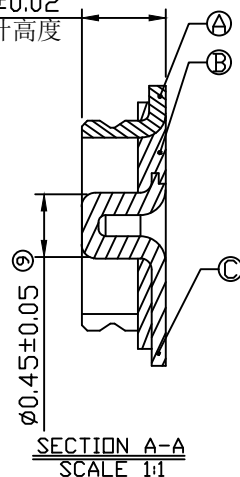

STANDARD P.C.B. LAYOUT
TOLERANCE: ±0.05 SCALE: 1:2

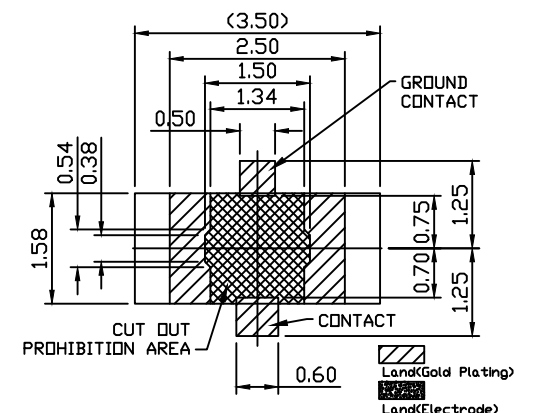

RECOMMENDED LAND PATTERN
TOLERANCE: ±0.05 SCALE: 1:2

Notes:

- 1.1 Rated Voltage 60V AC
- 1.2 Frequency Range 0~6GHz
- 1.3 Impedance 50W
- 1.4 Operating Temperature -40℃~+90℃
- 2.1 Voltage Standing Wave Ratio(VSWR) 1.3 max. at 0~3GHz
- 2.2 Durability 1.4 max. at 3~6GHz 30 cycles

HF-RF4-18A2	C	CONTACT	1	COPPER ALLOY/GOLD PLATED OVER NI
	B	HOUSING	1	Hight Temp. Plastic UL94V-0/BLACK
	A	SHELL	1	COPPER ALLOY/Au PLATED OVER NI
	ITEM	PART NAME	Q'TY	MATERIAL/FINISH
PROD. NO.	BOM LIST			

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD
COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	HF-RF4-18A2		DRAWING	Z.L.Liang	DWG.No.	
PART NO.	HF-RF4-18A2		CHECK	G.C.Chen	REV.	A0
UNIT: mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1	ANGLE	G.C.Chen	DATE	
		±2°	SCALE	1:1	PAGE	1 OF 1