

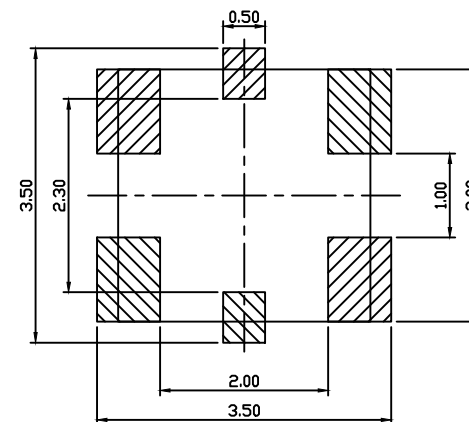
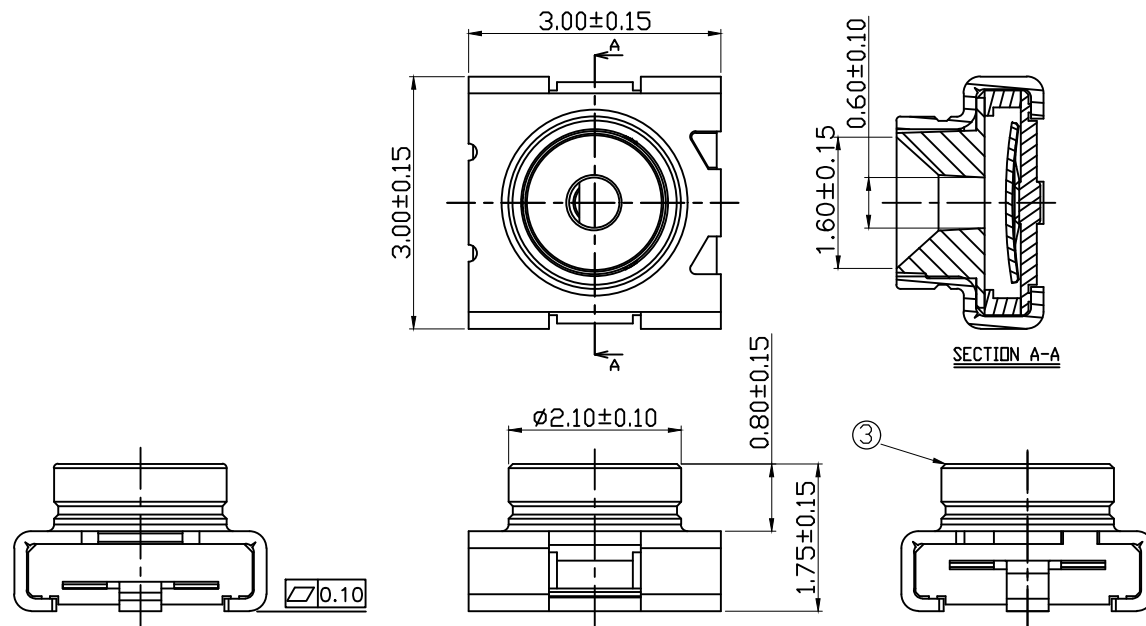
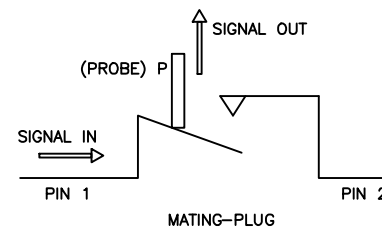


RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE

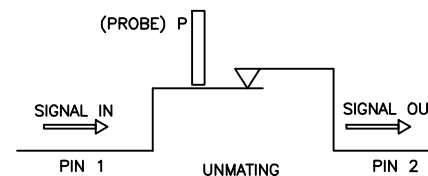

Recommend PCB Layout
General Tolerance: ± 0.05

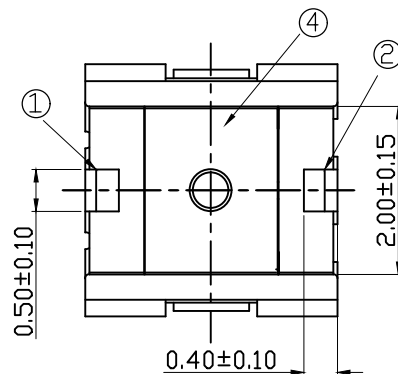

NOTES:

- 1.1 Rated Voltage 250V AC
- 1.2 Frequency Range 0~6GHz
- 1.3 Impedance 50Ω
- 1.4 Operating Temp. -40℃~+85℃
- 2.1 Voltage Standing Wave Ratio (VSWR)
 - 1.2 max (DC~3GHz)
 - 1.3 max (3~6GHz)
- 2.2 Isolation
 - 20dBmin (DC~3GHz)
 - 15dBmin (3~6GHz)
- 2.3 Insertion loss
 - 0.10dBmax (DC~3GHz)
 - 0.20dBmax (3~6GHz)
- 2.4 Durability 500 cycles
- 3.1 Packing:
ape & reel 1000Pcs/Reel (Φ178mm)

HF-RF1-06A1	4	Case	1	Engineering plastic	UL94 V-0
	3	Output teminnal	1	Copper Alloy	SILVER PLATING
	2	Input terminal(R)	1	Copper Alloy	GOLD PLATING
	1	Input terminal(C)	1	Stainless Steel	GOLD PLATING
PROD. NO.	ITEM PART NAME Q'TY		MATERIAL/FINISH		

CIKI 东莞市皓富电子科技有限公司

DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DRAWING		Z.L.Liang		DWG.No.	
PART NO.		CHECK		G.C.Chen		REV.	
UNIT:		APPROVAL		G.C.Chen		DATE	
mm		SCALE		1:1		PAGE	
TOLERANCE UNLESS OTHERWISE SPECIFIED		ANGLE		1000Pcs/Reel (Φ178mm)		1 OF 1	
X.X ± 0.3		±2°					
X.XX ± 0.2							
X.XXX ± 0.1							