


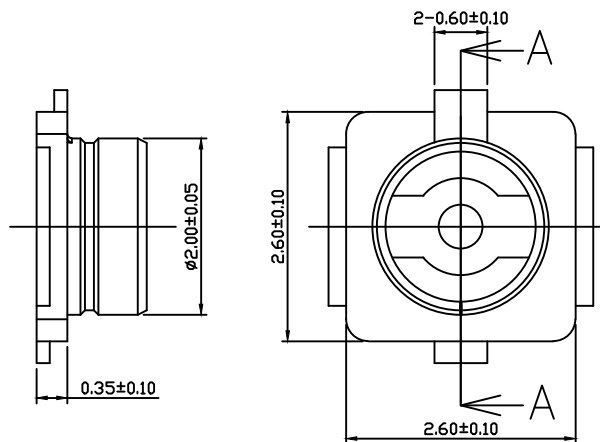
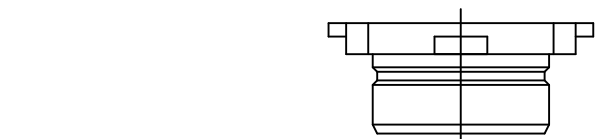


RoHS Compliant




SYMBOL	REV.	REVISION	APPROVAL	DATE

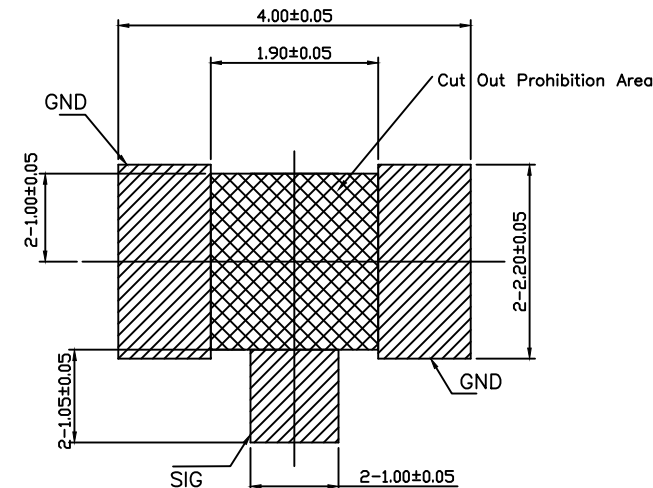

SECTION A-A

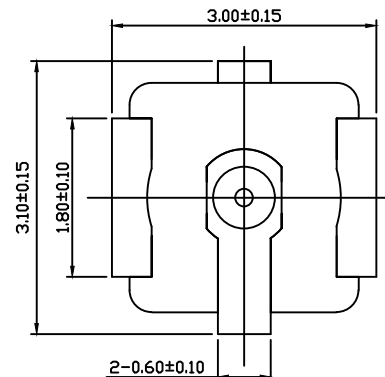

RECOMMENDED P.C.B. LAYOUT
TOP VIEW(TOLERANCE:±0.05)

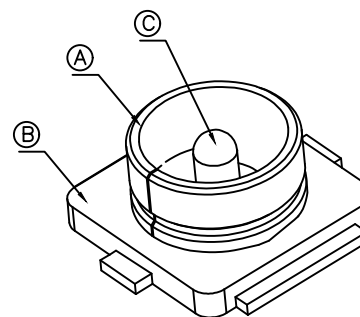

NOTES:

- 1.1 Rated Voltage 60V AC
- 1.2 Frequency Range 0~6GHz
- 1.3 Impedance 50Ω
- 1.4 Operating Temperature -40℃~+90℃
- 2.1 Voltage Standing Wave Ratio(VSWR)
 - 1.3 max. at 0~3GHz
 - 1.4 max. at 3~6GHz
- 2.2 Durability 30 cycles
- 3.1 Packing tape & reel 1000Pcs/Reel (Φ178mm)

HF-RF1-08A2	C	CONTACT	1	COPPER ALLOY/GOLD PLATED OVER NI
	B	HOUSING	1	High Temp. Plastic UL94V-0/BLACK
	A	SHELL	1	COPPER ALLOY/Au PLATED OVER NI
	ITEM	PART NAME	Q'TY	MATERIAL/FINISH
PROD. NO.	BOM LIST			

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD
COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME					DRAWING	Z.L.Liang	DWG.No.	
PART NO.		HF-RF1-08A2			CHECK	G.C.Chen	REV.	A0
	UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3	ANGLE	APPROVAL	G.C.Chen	DATE	
	mm		X.XX ± 0.2					
			X.XXX ± 0.1	±2°	SCALE	1:1	PAGE	1 OF 1