



RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE

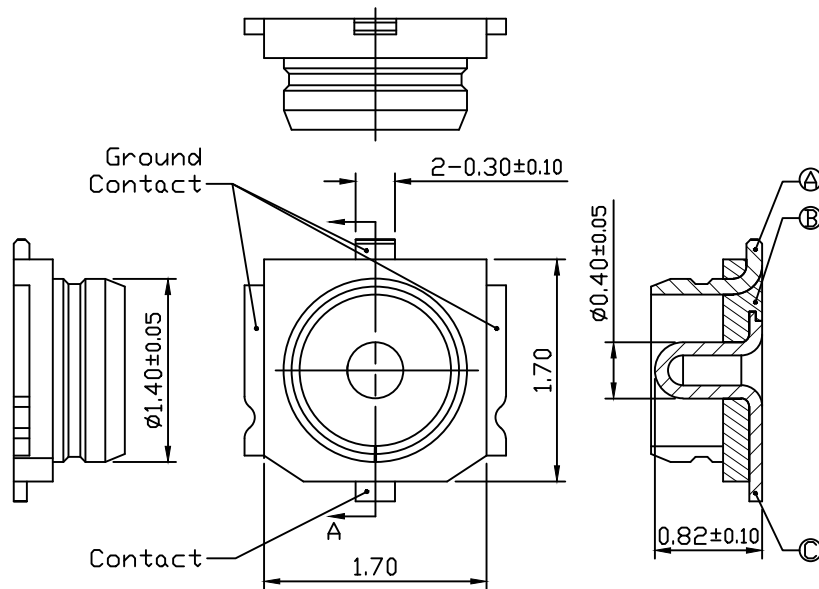

Section A-A
Scale 1:1

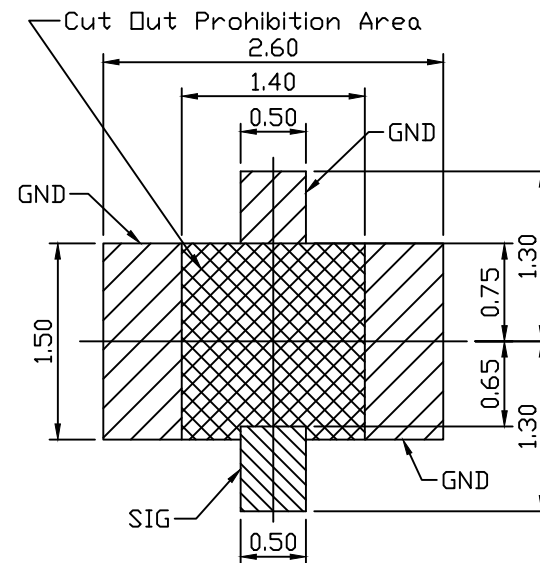

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLERANCE: ± 0.05)

NOTES:

- 1.1 Rated Voltage 60V AC
- 1.2 Frequency Range 0~6GHz
- 1.3 Impedance 50Ω
- 1.4 Operating Temperature $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$
- 2.1 Voltage Standing Wave Ratio (VSWR)
 - 1.3 max. at 0~3GHz
 - 1.4 max. at 3~6GHz
- 2.2 Durability 30 cycles
- 3.1 Packing tape & reel 3000Pcs/Reel ($\phi 178\text{mm}$)

HF-RF3-14A2	C	CONTACT	1	COPPER ALLOY/GOLD PLATED OVER NI
	B	HOUSING	1	High Temp. Plastic UL94V-0/BLACK
	A	SHELL	1	COPPER ALLOY/Au PLATED OVER NI
	ITEM	PART NAME	Q'TY	MATERIAL/FINISH
PROD. NO.	BOM LIST			

681-0014A2-1

CUSTOMER DRAWING A

FDX0014A2

H0.90mm, 4个焊脚 外壳镀金

1:1

CIKI 东莞市皓富电子科技有限公司

DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	HF-RF3-14A2		DRAWING	Z.L.Liang	DWG.No.	
PART NO.	HF-RF3-14A2		CHECK	G.C.Chen	REV.	A0
UNIT: mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X $\pm$ 0.3 X.XX $\pm$ 0.2 X.XXX $\pm$ 0.1	ANGLE	G.C.Chen	DATE	
		$\pm 2^{\circ}$	SCALE	1:1	PAGE	1 OF 1