


RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE

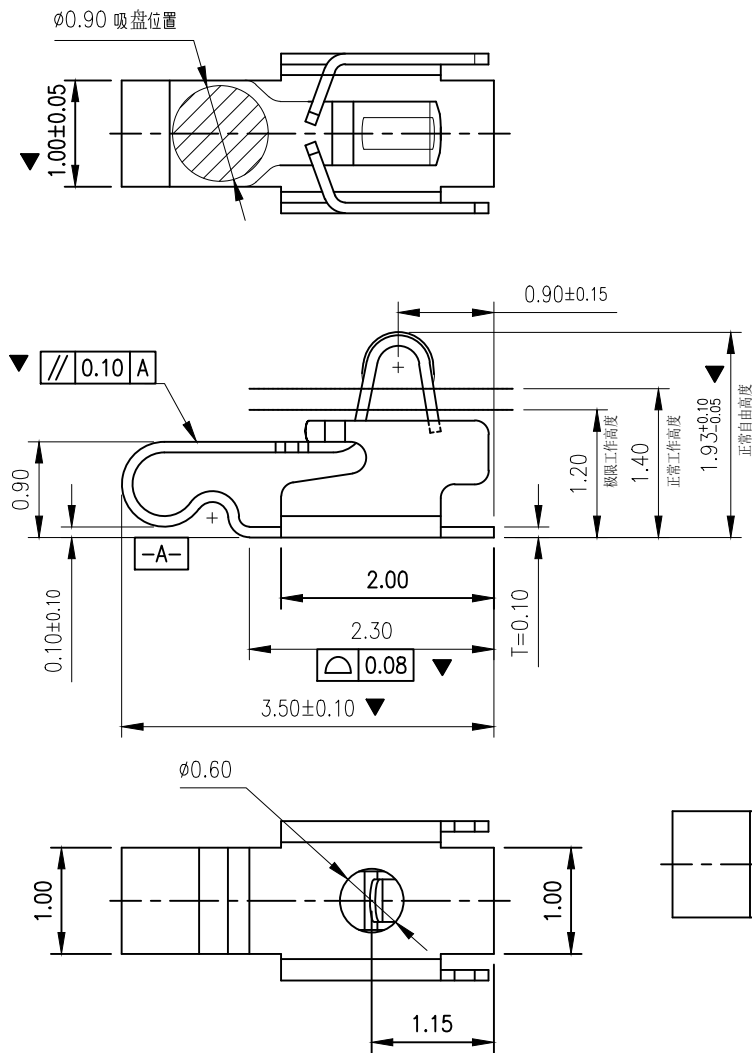


技术要求:

- 1.材质:不锈钢SUS301, $T=0.10 \pm 0.005$;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大 0.03mm ;
- 3.扭曲: $45^\circ/1000\text{mm}$,拱形 $5\text{mm}/1000\text{mm}$;
- 4.标示有“▼”符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在 $60\text{gf} \sim 80\text{gf}$ 之间
- 8.镍底 $50 \sim 80\text{u"min}$,焊接区域镀金,接触区域镀金 1U"MIN

焊盘尺寸

尺寸公差 ± 0.05

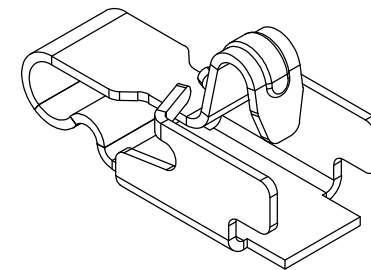

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Z.L.Liang	DWG.No.	
PART NO.		HF-AS-22A1			CHECK	G.C.Chen	REV.	A0
	UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3	ANGLE	APPROVAL	G.C.Chen	DATE	
	mm		X.XX ± 0.2					
			X.XXX ± 0.1	±2°	SCALE	1:1	PAGE	1 OF 1