

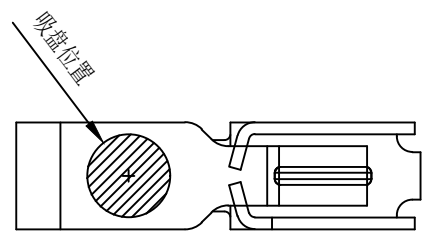


RoHS Compliant

| SYMBOL | REV. | REVISION | APPROVAL | DATE |
|--------|------|----------|----------|------|
|        |      |          |          |      |
|        |      |          |          |      |

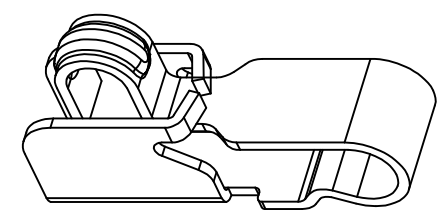

- 技术要求:
- 1.材质:不锈钢SUS301,T=0.10±0.005;
  - 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
  - 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
  - 4.标示有“▼”符号的为重点控制和检验尺寸;
  - 5.未标注之R MAX R0.13;
  - 6.电镀须满足48小时盐雾测试;
  - 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
  - 8.镍底50~80u“min,产品外表面镀全金1U“MIN

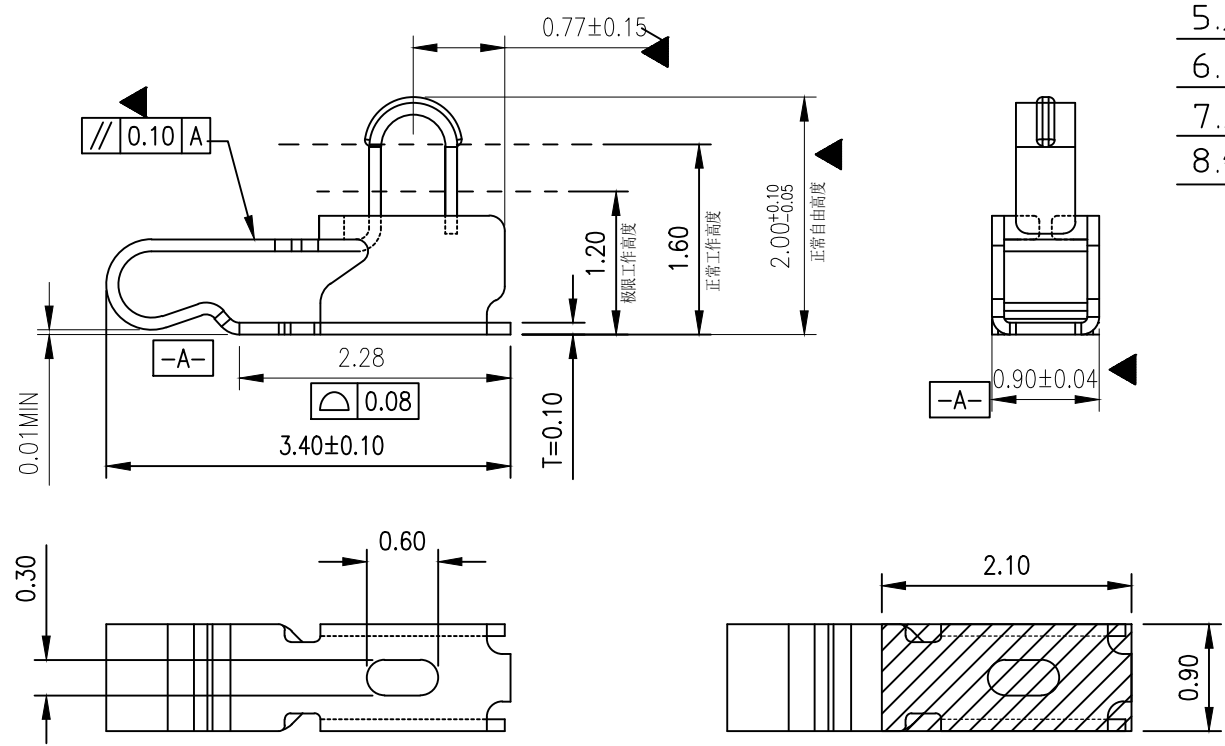

焊盘尺寸  
尺寸公差 ±0.05

|           |             |                                         |                                        |         |           |         |             |
|-----------|-------------|-----------------------------------------|----------------------------------------|---------|-----------|---------|-------------|
| PART NAME |             | CONNECTOR                               |                                        | DRAWING | Z.L.Liang | DWG.No. |             |
| PART NO.  |             | HF-AS-33B2                              |                                        | CHECK   | G.C.Chen  | REV.    | A0          |
|           | UNIT:<br>mm | TOLERANCE UNLESS<br>OTHERWISE SPECIFIED | X.X ± 0.3<br>X.XX ± 0.2<br>X.XXX ± 0.1 | ANGLE   | G.C.Chen  | DATE    |             |
|           |             |                                         |                                        | ±2°     | SCALE     | 1:1     | PAGE 1 OF 1 |