
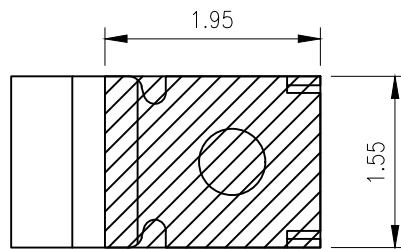
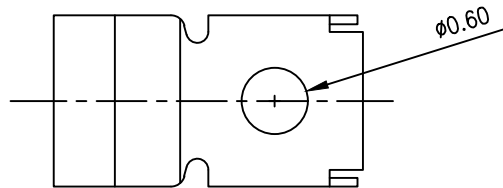

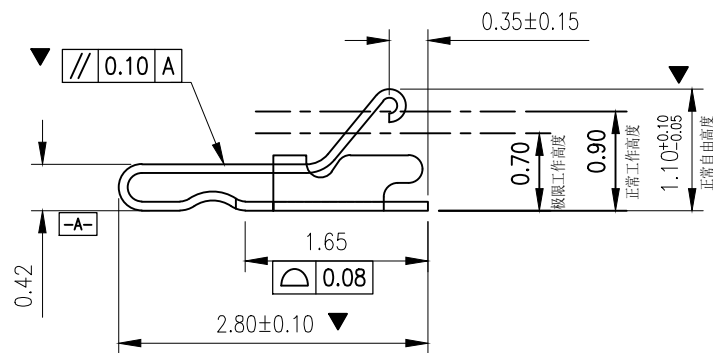


RoHS Compliant

| SYMBOL | REV. | REVISION | APPROVAL | DATE |
|--------|------|----------|----------|------|
|        |      |          |          |      |
|        |      |          |          |      |

Ø1.00 吸盘位置

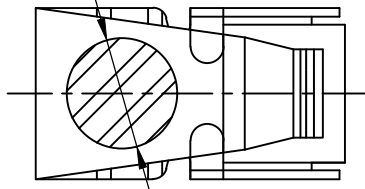


焊盘尺寸

尺寸公差 ±0.05

技术要求:

- 1.材质:不锈钢SUS301,T=0.08±0.005;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
- 4.标示有“▼”符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镍底50~80u"min,焊接区域镀金,接触区域镀金1U"MIN



**CIKI** 东莞市皓富电子科技有限公司  
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

|                                                                                      |       |                                         |                                        |       |          |           |         |        |
|--------------------------------------------------------------------------------------|-------|-----------------------------------------|----------------------------------------|-------|----------|-----------|---------|--------|
| PART NAME                                                                            |       | CONNECTOR                               |                                        |       | DRAWING  | Z.L.Liang | DWG.No. |        |
| PART NO.                                                                             |       | HF-AS-26B1                              |                                        |       | CHECK    | G.C.Chen  | REV.    | A0     |
|  | UNIT: | TOLERANCE UNLESS<br>OTHERWISE SPECIFIED | X.X ± 0.3<br>X.XX ± 0.2<br>X.XXX ± 0.1 | ANGLE | APPROVAL | G.C.Chen  | DATE    |        |
|                                                                                      | mm    |                                         |                                        | ±2°   | SCALE    | 1:1       | PAGE    | 1 OF 1 |