
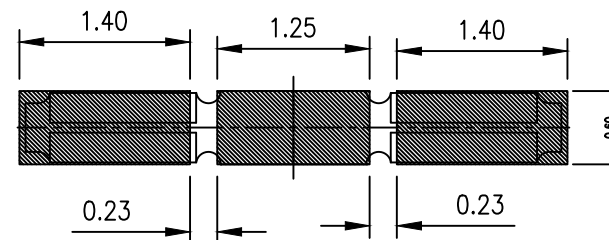
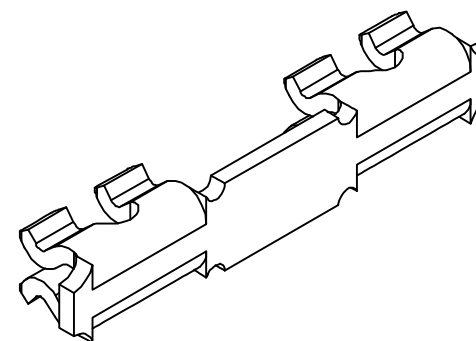


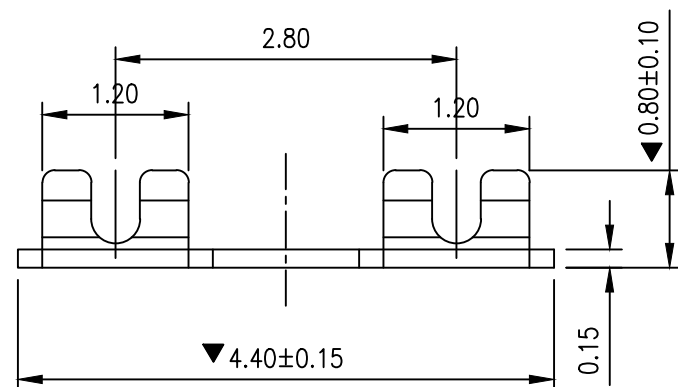


RoHS Compliant

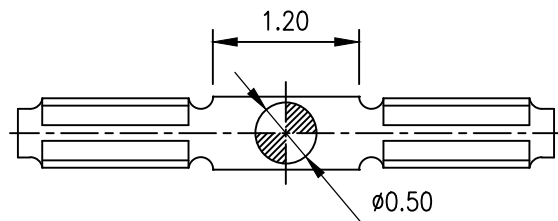

焊盘尺寸

尺寸公差 ±0.05

技术要求:

1.材质:不锈钢SUS301,T=0.15±0.005;

▼2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;

3.扭曲:45°/1000mm,拱形 5mm/1000mm;

4.标示有"▼"符号的为重点控制和检验尺寸;

5.未标注之R MAX R0.13;

6.电镀须满足24小时盐雾测试;

7.寿命测试>2万次,产品弹力要求在60gf~80gf之间

8.镍底50~80u"min,产品外表面镀锡80~100U"MIN

CIKI 东莞市皓富电子科技有限公司

DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

PART NO.



UNIT:
mm

TOLERANCE UNLESS
OTHERWISE SPECIFIED

X.X ± 0.3
X.XX ± 0.2
X.XXX ± 0.1

ANGLE
±2°

DRAWING

CHECK

APPROVAL

SCALE

Z.L.Liang

G.C.Chen

G.C.Chen

1:1

DWG.No.

REV.

DATE

PAGE

A0

1 OF 1