


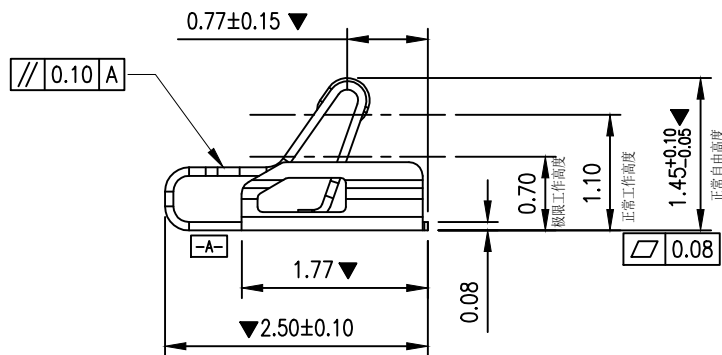


RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE

Ø0.60 吸盘位置




焊盘尺寸

尺寸公差 ±0.05

技术要求:

- 1.材质:不锈钢SUS301,T=0.08±0.005;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
- 4.标示有" ▼"符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镍底50~80u"min,焊接区域镀金,接触区域镀金1U"MIN



3D VIEW

CIKI 东莞市皓富电子科技有限公司

DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Z.L.Liang	DWG.No.	
PART NO.		HF-AS-94A1		CHECK	G.C.Chen	REV.	A0
	UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1	ANGLE ±2°	APPROVAL	G.C.Chen	DATE
					SCALE	1:1	PAGE

1 OF 1