
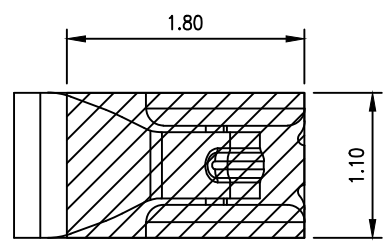

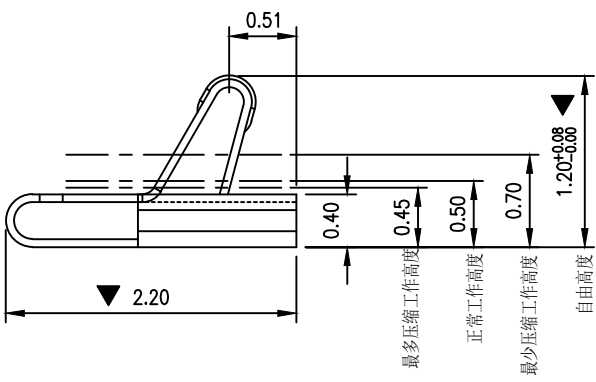


RoHS Compliant


SYMBOL	REV.	REVISION	APPROVAL	DATE

Ø0.70吸取位置

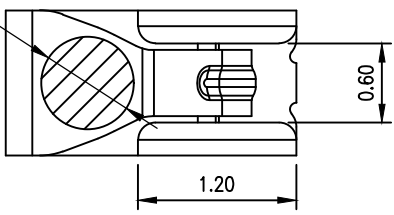

焊盘尺寸

尺寸公差 ±0.05



技术要求:

- 1.材质:不锈钢SUS301,T=0.06±0.005;
- ▼2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
- 4.标示有"▼"符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镍底50~80u"min,焊接区域镀金,接触区域镀金1U"MIN

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD
COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Z.L.Liang	DWG.No.	
PART NO.		HF－AS－99A1			CHECK	G.C.Chen	REV.	A0
	UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3	ANGLE	APPROVAL	G.C.Chen	DATE	
	mm		X.XX ± 0.2		SCALE	1: 1	PAGE	1 OF 1
			X.XXX ± 0.1	±2°				