



RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE








- NOTES
1. CURRENT RATING: 1A.
 2. CONTACT RESISTANCE: 100mΩ MAX.;
 3. INSULATION RESISTANCE: 100MΩ MIN.;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 30N MAX.;
 7. CONNECTOR UNMATING FORCES: 3N MIN.;

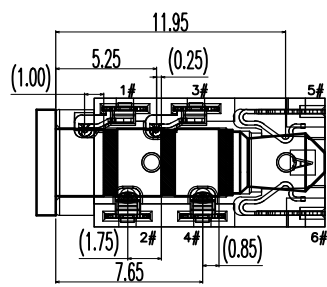


4 极插头接触点位置尺寸

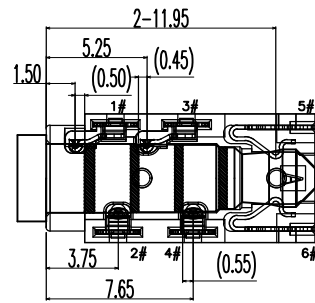

5 极插头接触点位置尺寸

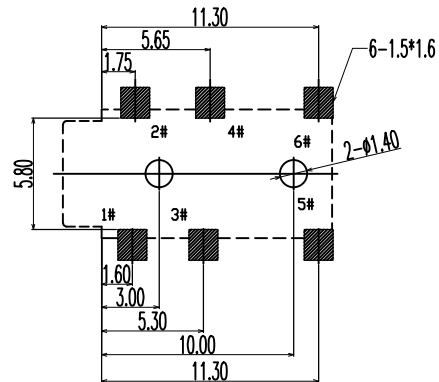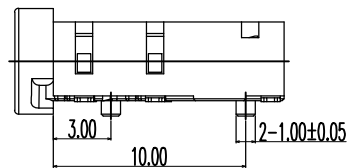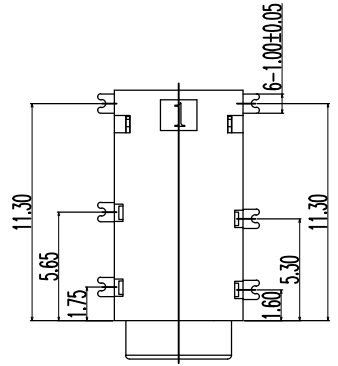

P.C.B LAYOU
TOP VIEW

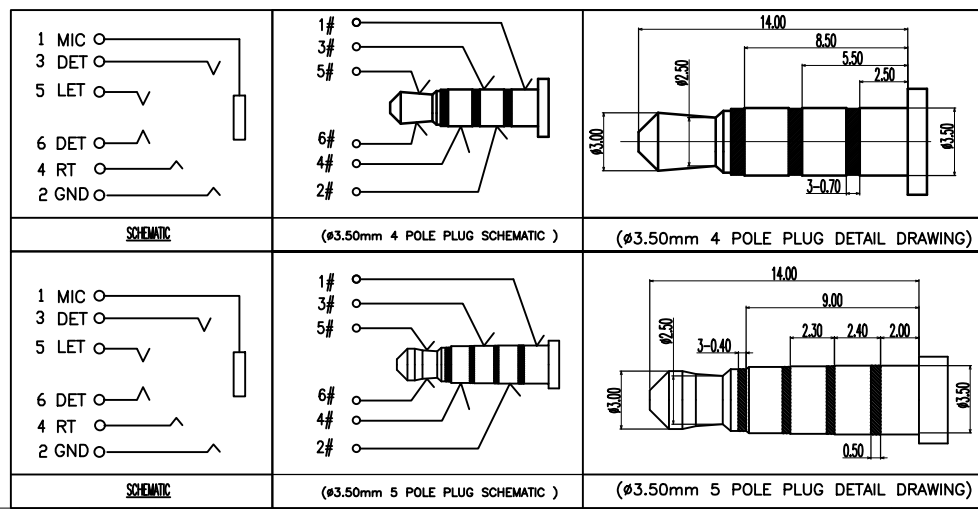

7	HOUSING	1	HIGH TEMP PLASTIC,COLOR BLACK.	
6	TERMINAL 6#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	
5	TERMINAL 5#	1		
4	TERMINAL 4#	1		
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	
2	TERMINAL 2#	1		
1	TERMINAL 1#	1		
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO.,LTD
COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	STEREO JACK (4 POLES)	DRAWING	Y.C.Zhang	DWG.No.	
PART NO.	PJ-3112-C	CHECK	G.C.Chen	REV.	A1
UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED	WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	APPROVAL	G.C.Chen	DATE
mm		ANGLE ±2°	SCALE	1:1	PAGE
					1 OF 1