

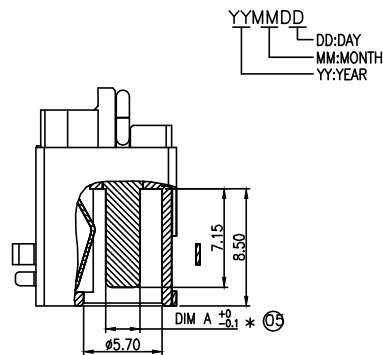


HF





無鹵標識

SYMBOL	REV.	REVISION	APPROVAL	DATE





SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 20V, 10A Min.
 - 1-2. CONTACT RESISTANCE: 30 mΩ Max. (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100 MΩ Min.-MEASURED BY 500V DC.
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 3.0 KGF Max.
 - 2-2. WITHDRAWAL FORCE : 0.35 KGF Min.
3. LIFE TEST: 5000 CYCLES MIN.

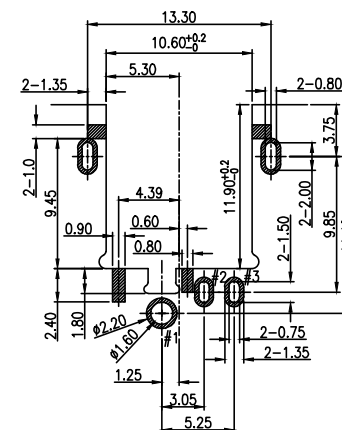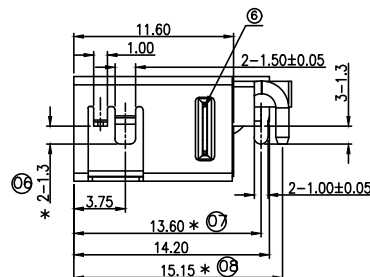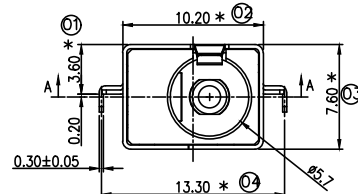


PCB LAYOUT TOP VIEW
TOLERANCES:±0.05

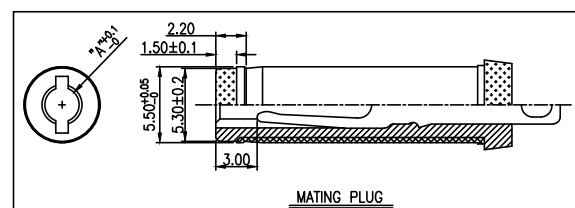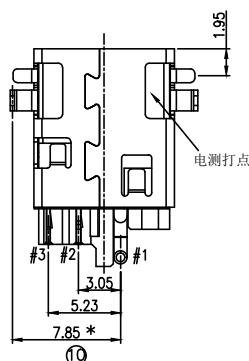

MATING PLUG

料 号	DIM A	D/C	PCB孔规要求
DC-3061-25-004	Ø2.50	有	常 规
DC-3061-20-004	Ø2.00	有	客户专用孔规
DC-3061-25-001	Ø2.50	无	常 规

⑥	TERMINAL	1	SUS301	N/A
⑤	SHELL	1	C2680R-EH	NI 50U ^{***}
④	CENTER PIN(+)	1	HBI59-1	Gold Flash Over NI 50U ^{***}
③	SHUNT TERMINAL	1	C2680R-EH	Gold Flash On Contact Area 100U ^{***} Sn On Solder Pad; All Over NI 50U ^{***} Min.
②	TIP SPRING(-)	1	C5210R-EH	
①	HOUSING	1	LCP UL 94V-0 (HF)	Black



CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO., LTD

PART NAME		DC POWER JACK			DRAWING	Z.L.Liang	DWG.No.	
PART NO.		DC-3061-25-001			CHECK	G.C.Chen	REV.	A0
	UNIT :	TOLERANCE UNLESS	X.X ± 0.3	ANGLE	APPROVAL	G.C.Chen	DATE	
	mm	OTHERWISE SPECIFIED	X.XX ± 0.2 X.XXX ± 0.1		±2°	SCALE	1:1	PAGE

COPYRIGHT RESERVED,PLEASE DO NOT COPY.