








RoHS Compliant




PCB LAYOUT TOP VIEW
TOLERANCES: ±0.05



YYMMDD
DD: DAY
MM: MONTH
YY: YEAR

料号	"A"	D/C
DC-3003-25-000	Ø2.5	有
DC-3003-20-000	Ø2.0	
DC-3003-17-000	Ø1.65	
DC-3003-15-000	Ø1.50	无
DC-3003-25-006	Ø2.5	
DC-3003-20-006	Ø2.0	
DC-3003-17-006	Ø1.65	
DC-3003-15-006	Ø1.50	

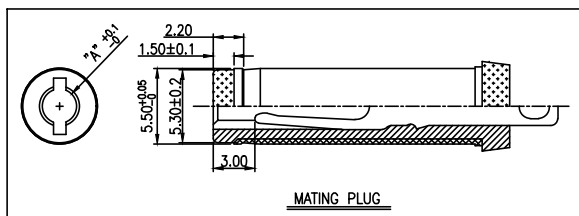

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: DC 20V, 10A.
- 1-2. CONTACT RESISTANCE: 30 mΩ Max. (INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
- 1-4. INSULATION RESISTANCE: 100 MΩ Min. MEASURED BY 500V DC.

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE: 3.0 KGF Max.
 - 2-2. WITHDRAWAL FORCE: 0.80 KGF Min.
3. LIFE TEST: 5000 CYCLES MIN.

⑦	SEALED PLATE	1	SUS301	N/A
⑥	COVER	1	LCP UL 94V-0 (HF)	Black
⑤	SHELL	1	C2680R-EH	Ni 50U"
④	CENTER PIN(+)	1	HBI59-1 	Gold Flash Over Ni 50U"
③	SHUNT TERMINAL	1	C2680R-EH	Gold Flash On Contact Areas 100U" Sn On Solder Tab; All Over Ni 50U" Min.
②	TIP SPRING(-)	1	C5210R-EH	
①	HOUSING	1	LCP UL 94V-0 (HF)	Black
No.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	DC PHONE JACK	DRAWING	Z.L.Liang	DWG.No.	
PART NO.	DC-3003-25-000	CHECK	G.C.Chen	REV.	A0
UNIT:	TOLERANCE UNLESS mm OTHERWISE SPECIFIED	ANGLE	G.C.Chen	DATE	
	X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1	±2°	SCALE	1:1	PAGE
					1 OF 1