



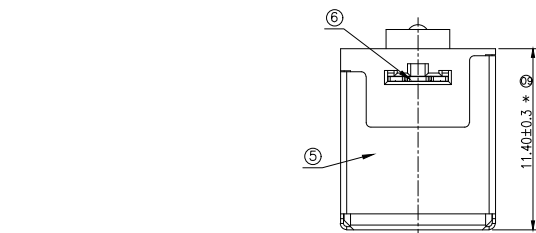



RoHS Compliant





A	开发图面	2022.05.24	陈桂昌
B	新增D/C	2022.09.07	陈桂昌
C	新增外壳镀亚银规格	2025.06.10	陈桂昌



3D VIEW



DATE CODE:
YY:YEAR(15~)
WW:WEEK(01~)

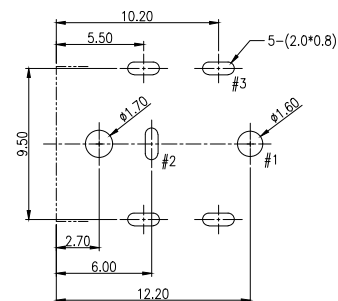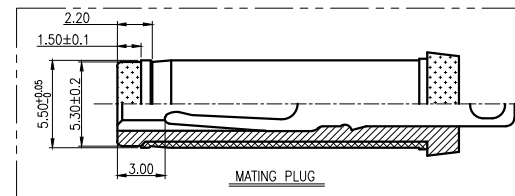

PCB LAYOUT TOP VIEW
TOLERANCES:±0.05

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: DC 24V, 10A .
- 1-2. CONTACT RESISTANCE: 30 mΩ Max. (INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
- 1-4. INSULATION RESISTANCE: 100 MΩ Min.MEASURED BY 500V DC.

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 40 N Max.
- 2-2. WITHDRAWAL FORCE : 3 N Min.
3. LIFE TEST: 5000 CYCLES MIN.

⑥	TERMINAL	1	SUS301	N/A
⑤	SHELL	1	SUS301	Ni 50U"
④	CENTER PIN(+)	1	ZINC ALLOY	Ni 50U"
③	SHUNT TERMINAL	1	C2680R-EH	鍍底50u", 鍍銀10u"
②	TIP SPRING(-)	1	C5210R-EH	鍍底50u", 鍍銀10u"
①	HOUSING	1	PA9T UL 94V-0	Black
No.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	DC PHONE JACK	DRAWING	Z.L.Liang	DWG.No.	
PART NO.	DC-091D-2X0-18X-00X	CHECK	G.C.Chen	REV.	A0
UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGLE	APPROVAL	DATE	
mm	X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1	±2°	SCALE	PAGE	1 OF 1