
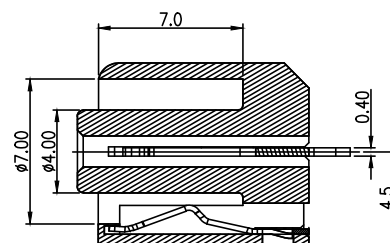
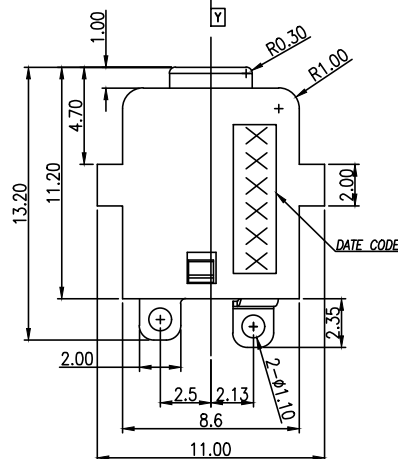





RoHS Compliant



SYMBOL	REV.	REVISION	APPROVAL	DATE

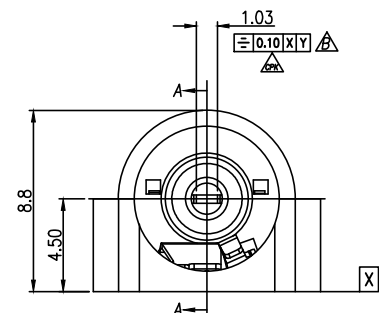

SECTION A-A

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 20V, 1A Min.
 - 1-2. CONTACT RESISTANCE:
50 MILLIOHMS Max. FOR INITIAL,
80 MILLIOHMS Max. AFTER 5000 CYCLES.
 - 1-3. INSULATION RESISTANCE: 100 MEGAOHMS Min.
BY 500V DC AFTER 1 MINUTE.
 - 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V
RMS AFTER 1 MINUTE.
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF(2.94~29.4N)
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF(2.94~29.4N)
3. LIFE TEST: 5,000 CYCLES.

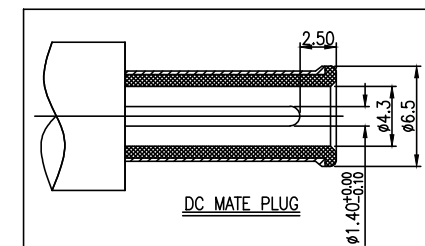

③	HOUSING	1	PA66 HF	Black
②	TERMINAL 2#	1	C5210R T=0.25	Sn80U",Ni底50U
①	TERMINAL 1#	1	C2680R-EH T=0.40	Sn80U",Ni底50U
No.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO., LTD

PART NAME		DC POWER JACK			DRAWING	Z.L.Liang	DWG.No.	
PART NO.		DC-0182D-455			CHECK	G.C.Chen	REV.	A0
	UNIT:	TOLERANCE UNLESS	X.X ± 0.3	ANGLE	APPROVAL	G.C.Chen	DATE	
	mm	OTHERWISE SPECIFIED	X.XX ± 0.2 X.XXX ± 0.1		±2°	SCALE	1:1	PAGE

COPYRIGHT RESERVED,PLEASE DO NOT COPY.