

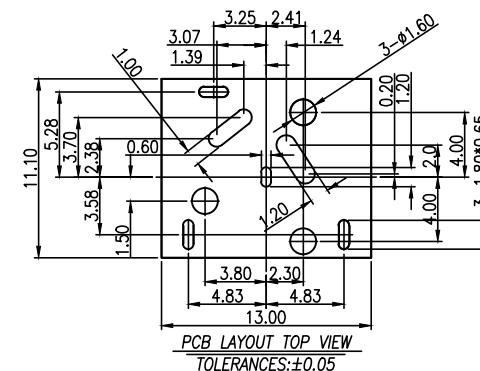
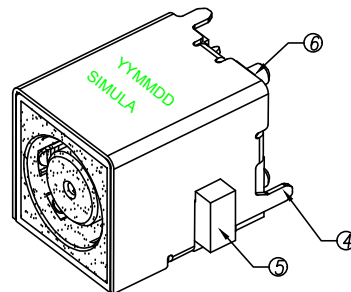


RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE

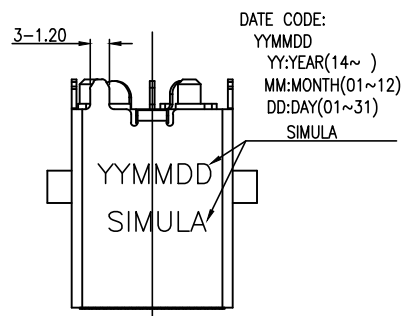

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 20V, 10A
 - CONTACT RESISTANCE:
50 MILLIOHMS Max. FOR INITIAL,
80 MILLIOHMS Max. AFTER 5000 CYCLES.
 - INSULATION RESISTANCE: 100 MEGAOHMS Min.
BY 500V DC AFTER 1 MINUTE.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V
RMS AFTER 1 MINUTE.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.3~3.0 KGF(2.94~29.4N)
 - WITHDRAWAL FORCE : 0.3~3.0 KGF(2.94~29.4N)
 - LIFE TEST: 5,000 CYCLES MIN.

⑦	MYLAR	1	9.0*9.0*0.075	
⑧	COVER	1	PA10T	Black
⑨	HOUSING	1	PA10T	Black
④	SHELL	1	C2680R-EH T=0.30	Ni 50U*Min
③	TERMINAL 3#	1	C5210R-EH T=0.30	Au0.8U",Ni底50U"
②	TERMINAL 2#	1	C5210R-EH T=0.30	Au0.8U",Ni底50U"
①	TERMINAL 1#	1	C5210R-EH T=0.30	Au0.8U",Ni底50U"
No.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	DC POWER JACK	DRAWING	Z.L.Liang	DWG.No.	
PART NO.	DC-1003F-313-254	CHECK	G.C.Chen	REV.	A0
UNIT: mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1	ANGLE ±2°	APPROVAL	G.C.Chen
				SCALE	1:1
				DATE	
				PAGE	1 OF 1