


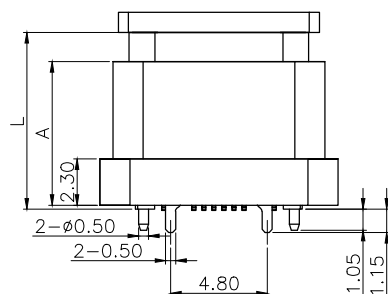



RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE

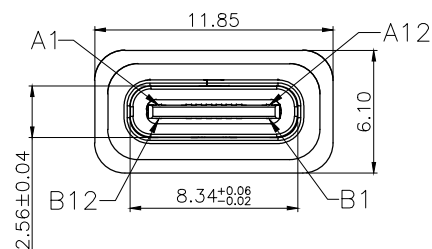


RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES

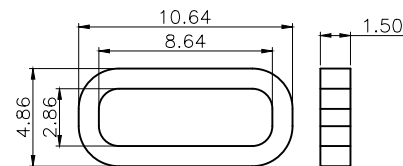

建议胶圈尺寸



PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

10.50	8.85	8.85	HF-WP-CF16-L-095
10.00	8.35	8.35	HF-WP-CF16-L-094
9.30	7.65	7.65	HF-WP-CF16-L-093
8.80	7.15	7.15	HF-WP-CF16-L-092
L=	A=	B=	model

6	防水圈	硅胶	BLACK	1PCS
5	SHELL	SUS 304 T=0.30mm	Ni Plated	1PCS
4	SHIELDING PLATE	SUS 301 T=0.15mm	/	1PCS
3	CONTACT	C7025 T=0.15mm	Au 1U/Ni Plated	1SET
2	SHELL HOUSING	PA10T+30%GF	BLACK	1PCS
1	HOUSING	LCP+30%GF	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		TYPE-C 16P FEMALE		DRAWING	Z.L.Liang	DWG.No.	
PART NO.		HF-WP-CF16-L-092		CHECK	G.C.Chen	REV.	A0
	UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1	ANGLE	G.C.Chen	DATE	
	mm			±2°	SCALE	1:1	PAGE 1 OF 1