



说明:


1. 胶芯: LCP 黑色 UL94V-0. 塑胶外套 PA9T 黑色; UL94V-0.
2. 端子: C18140 T=0.20mm, 半金锡1u" & 30u" (电镀)
3. 外壳: SUS T=0.25mm, 镀镍
4. 额定电流: 3A
5. 耐电压: 300V(AC) /1分钟
6. 接触阻抗: 30m Ω MAX.
7. 绝缘阻抗: 100M Ω MIN.
8. 插入力: 35N MAX.
9. 拔出力: 10N MIN. INITIAL 8-20N AFTER
10. 耐久测试: 5000次
11. 温度范围: -30°C~+80°C









Oval Ring assembly state:



Oval ring

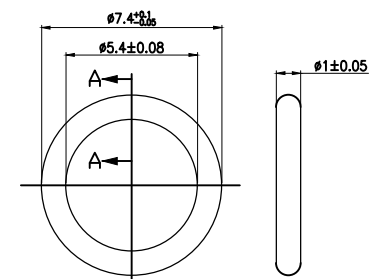

防水圈不用组装在产品上, 配套单独出货.

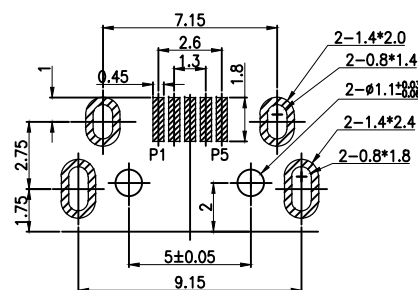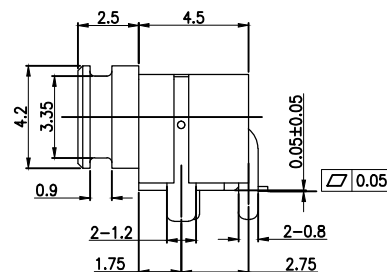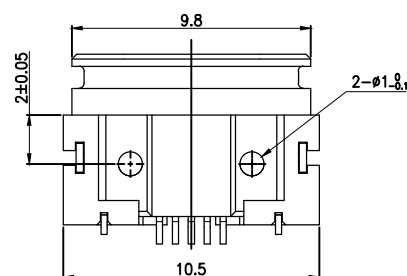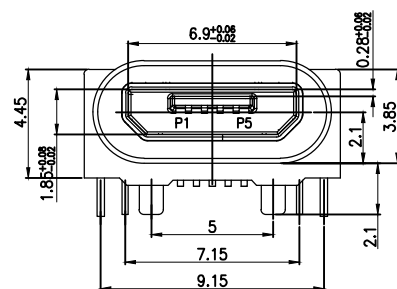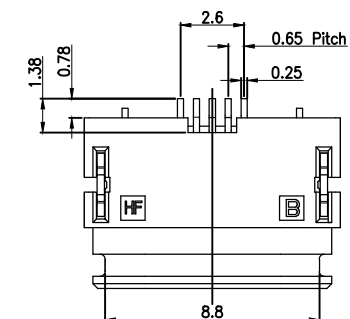

RECOMMENDED PCB LAYOUT

Tolerance: ±0.05mm

NO.	PART	NAME	QTY.	MATERIAL	REMARK
6	防水圈		1	Silicone	
5	固定片		2	C2680 t=0.3	1st: Ni 40u" MIN 2nd: Sn 80u" MIN
4	端子		5	C18140 t=0.2	Under plating: Ni plating 50u" MIN Contact area: Au plating 1U/130u" MIN Soldering area: Sn plating 80u" MIN
3	外壳		1	SUS304 t=0.25	Nickel 30u" Min plating all over
2	主体		1	LCP UL 94V-0	BLACK
1	外套		1	PA9T UL 94V-0	BLACK

HAOFU ELECTRONICS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.		MICRO USB BF 5P 90SMT 防水 有固定片(加高0.9)		CHECK	G.C.Chen	REV.	A1
UNIT :	mm	TOLERANCE	OTHERWISE	ANGLE	APPROVAL	DATE	
		UP TO 5	ABOVE 5 ~ 30	ABOVE 30	SCALE	PAGE	1 OF 1
		±0.2	±0.3	±0.5			
		±0.3	±0.5	±3°			