

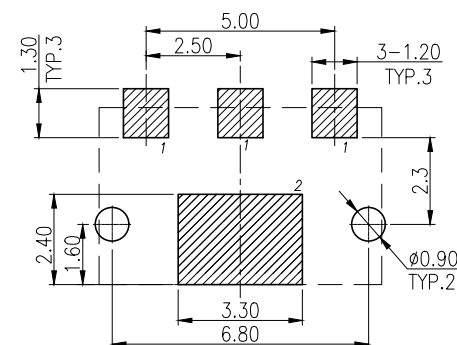
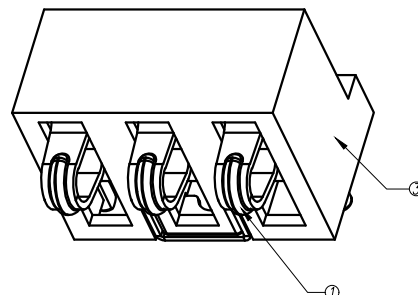
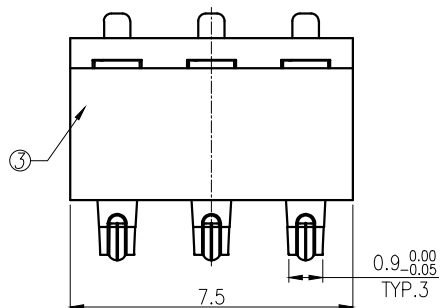
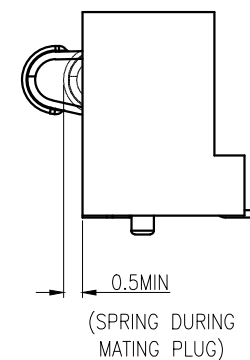


RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE

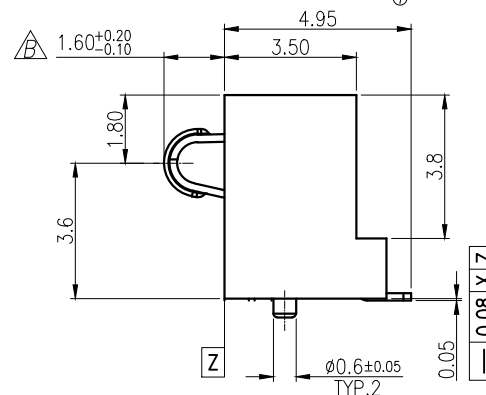

PCB LAYOUT TOP VIEW
TOLERANCES: ± 0.05

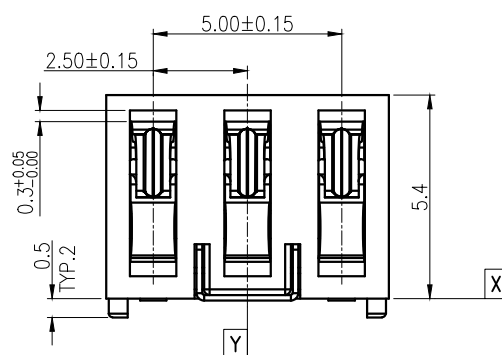

NOTES:

1. CONTACT CURRENT RATING: 0.5A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. Normal FORCES: 10N Min.;
7. Operating condition: Temperature: -30°C~+80°C;
Humidity: 80% R.H Max

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Z.L.Liang	DWG.No.	
PART NO.		BA3P25H540—R160			CHECK	G.C.Chen	REV.	A0
	UNIT:	TOLERANCE UNLESS	X.X ± 0.3	ANGLE	APPROVAL	G.C.Chen	DATE	
	mm	OTHERWISE SPECIFIED	X.XX ± 0.2 X.XXX ± 0.1		±2°	SCALE	1:1	PAGE

F

E

D

C

B

A