

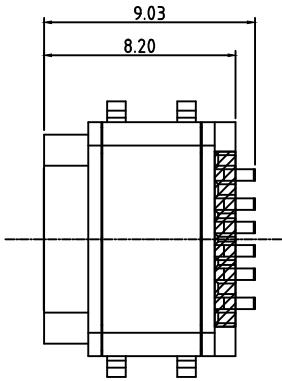

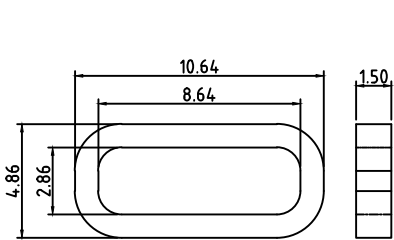
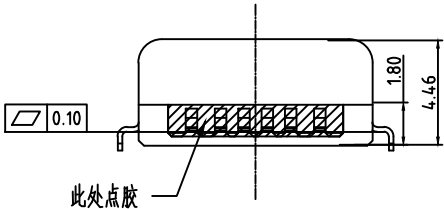



RoHS Compliant
Halogen Free


SYMBOL	REV.	REVISION	APPROVAL	DATE

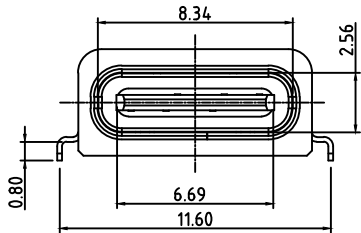

- 注明:
- 1. 电气性能
 - 1.1. 最大电流: 3A;
 - 1.2. 端子接触阻抗: 30 mΩ MAX.(INITIAL);
 - 1.3. 耐电压: 100V AC MIN.;
 - 1.4. 绝缘电阻: 100MΩ MIN.;
 - 2. 插拔次数: 10,000 CYCLES MIN.;
 - 3. 插入力: 5-20N;
 - 4. 拔出力: 6-20N;
 - 5. 防水等级: IPX7;
 - 6. 公头接触尺寸请参考 USB2.0 规范;
 - 7. 包装方式: 卷带包装;

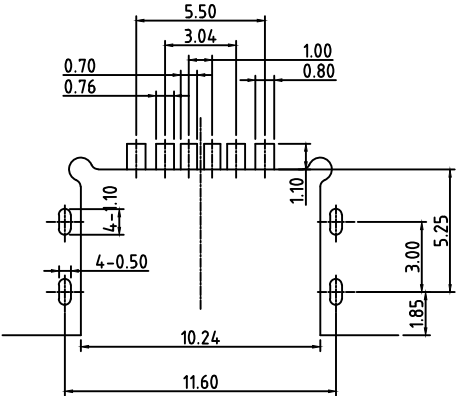

建议胶圈尺寸

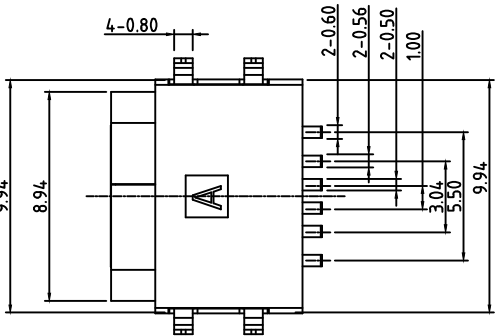

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

3	Shell	1	SUS304R-1/2H Ni PlatingT=0.25mm	
2	Contact	6	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

CIKI 东莞市皓富电子科技有限公司
DONGGUAN CITY HAOFU ELECTRONCS TECHNOLOGY CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	TYPE-C CONNECTOR	DRAWING	Z. L. Liang	DWG. No.	
PART NO.	TYPE-C 6P四脚沉板0.6防水IP67点胶	CHECK	G. C. Chen	REV.	A0
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED X. X ± 0.3 X. XX ± 0.2 X. XXX ± 0.1	ANGLE ±2°	APPROVAL	G. C. Chen	DATE
		SCALE	1:1	PAGE	1 OF 1