


RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE


NOTES:

1. CONTACT CURRENT RATING:1A;
2. CONTACT RESISTANCE:50mΩ MAX;
3. INSULATION RESISTANCE:100MΩ MIN;
4. DIELECTRIC WITHSTANDING:500V AC MIN;
5. DURABILITY:5000CYCLES MIN;
6. CONNECTOR MATING FORCES:2.94~29.4N(0.3~3.0kgf);
7. CONNECTOR UNMATING FORCES:2.94~29.4N(0.3~3.0kgf);

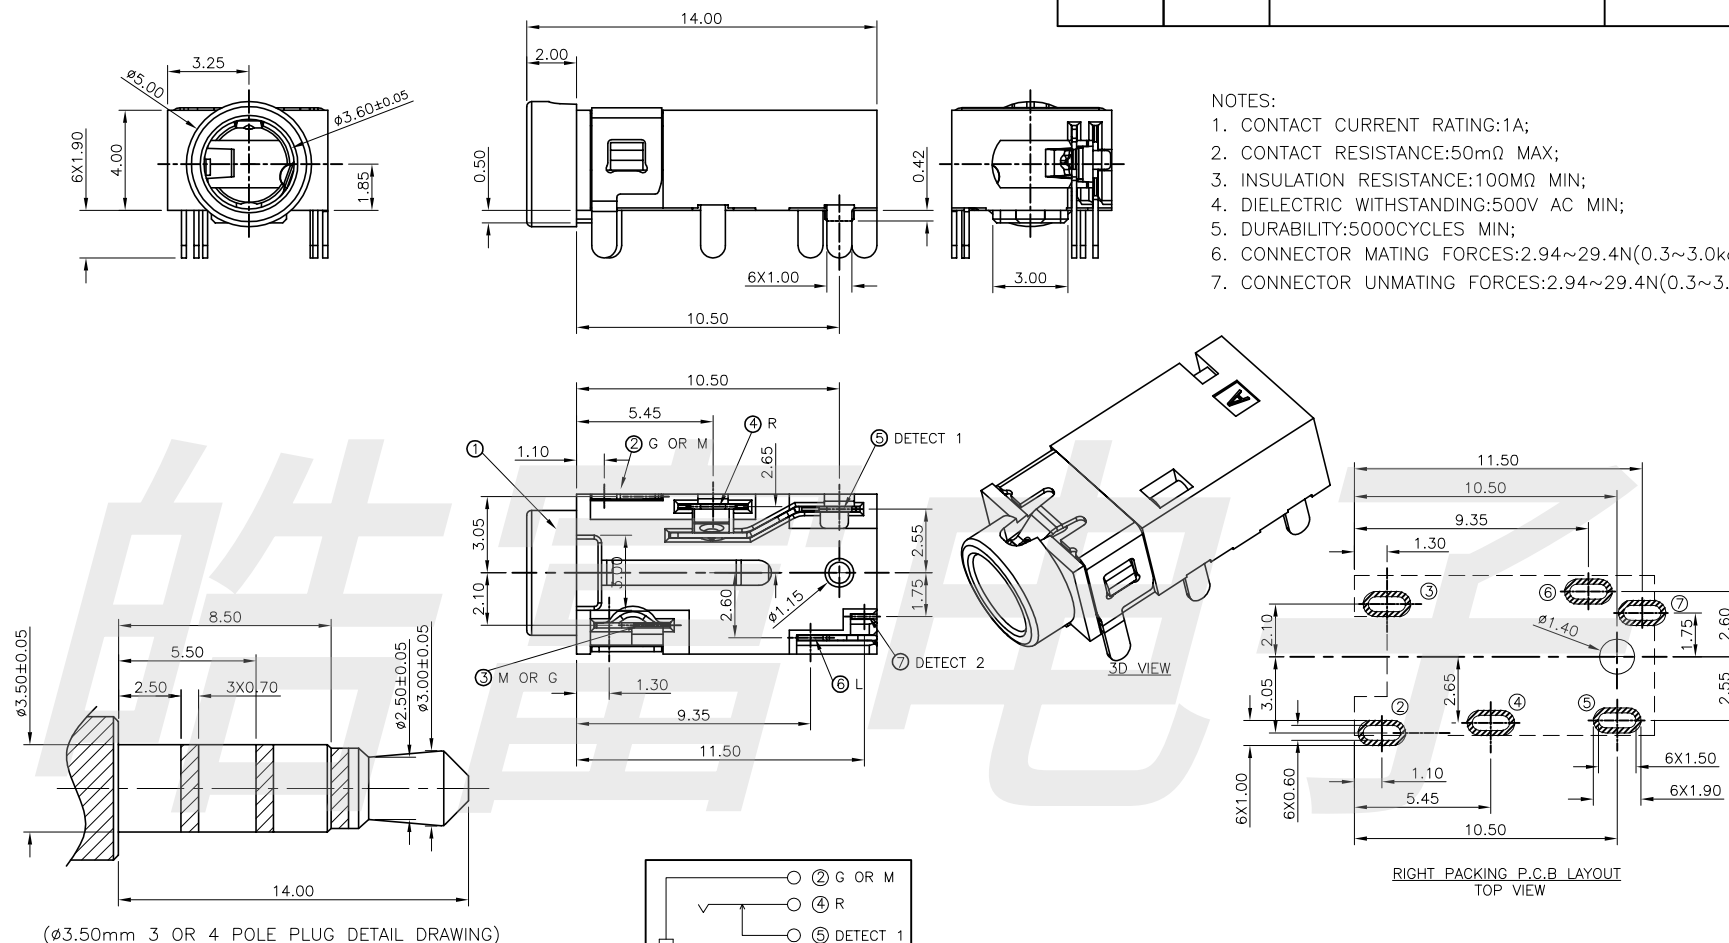

(ø3.50mm 3 OR 4 POLE PLUG DETAIL DRAWING)

07	CONTACT F	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
06	CONTACT E	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
05	CONTACT D	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
04	CONTACT C	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
03	CONTACT B	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
02	CONTACT A	1 PCS	PHOSPHOR BRONZE, T=0.20	Au Plated
01	HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	BLACK,
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION



推荐选5#;7#端为检测PIN

SCHEMATIC

CIKI 东莞市皓富电子科技有限公司
DONGGUAN HAOFU ELECTRONIC TECHNOLOGY CO., LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	PHONE JACK			DRAWING	Z.L.Liang	DWG.No.	
PART NO.	PJ-3973-B			CHECK	G.C.Chen	REV.	A0
	UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1	ANGLE	G.C.Chen	DATE	
	mm			±2°	SCALE	1:1	PAGE 1 OF 1